

CW-3000

T-SERIES
INDUSTRIAL CHILLER



Professional Temperature Control



Reliable



Energy Saving

S&A[®]
特域机电


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.

Features:

- 1.Compact design & easy operation;
- 2.Over-high temperature alarm & water flow alarm;
- 3.Superior radiating performance and ultra-low maintenance.

Pump Performance

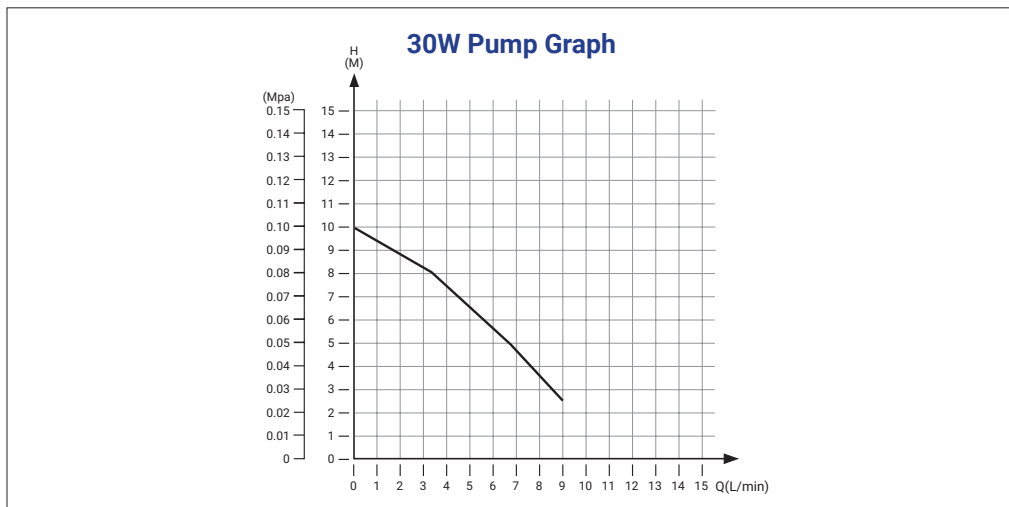


Technical Data:

Model	CW-3000TG	CW-3000DG
Voltage	AC 1P 220V-240V	AC 1P 110V
Frequency	50/60Hz	
Current	0.4~1A	0.4~0.9A
Machine power	0.1kW	
Radiating capacity	50W/°C	
Max. lift	10M	
Max. flow	10L/min	
Protection	Flow alarm	
Tank capacity	9 L	
Inlet and outlet	OD 10mm barbed connector	
N.W	9Kgs	9Kgs
G.W	11 Kgs	11 Kgs
Dimension	49 X 27 X 38cm (L X W X H)	
Package dimension	59 X 38 X 47cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

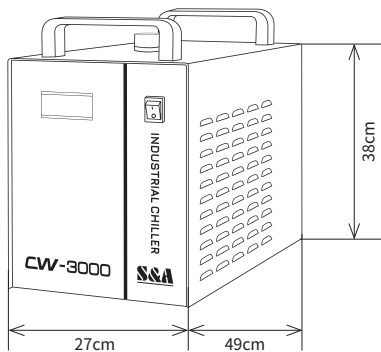

PACKAGE DIMENSION

