

CW-5000

T-SERIES
INDUSTRIAL CHILLER



Professional Temperature Control



Dual
Frequency
Power
220V
50/60Hz


Temperature
Stability
±0.3°C




Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Dual frequency power specification 220V 50/60Hz;
3. Delivers both precision and energy savings through dual intelligent temperature control modes.

Cooling Performance

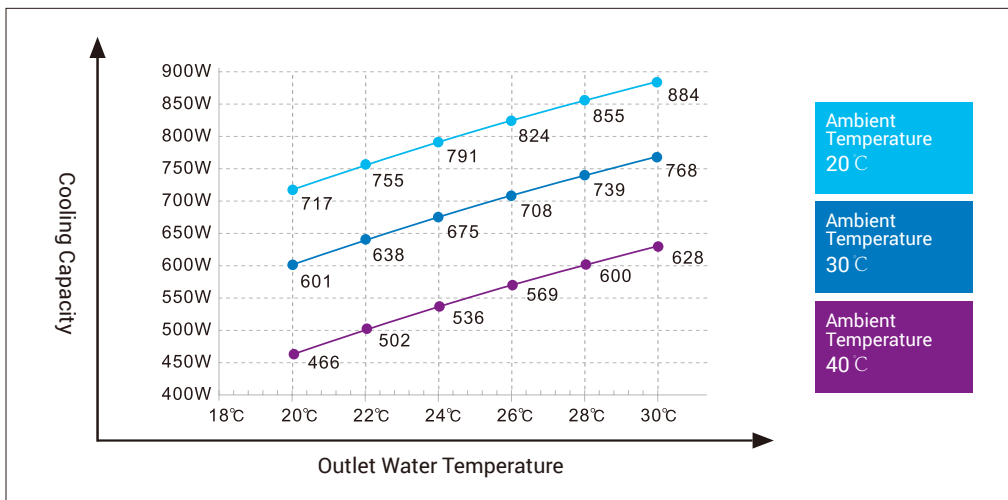

Pump Performance

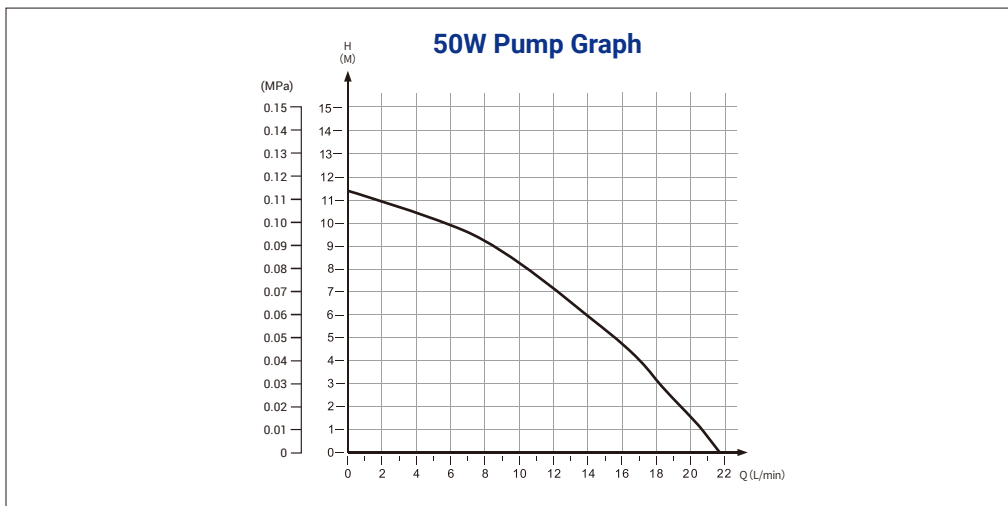


Technical Data:

Model	CW-5000THTY
Voltage	AC 1P 220~240V
Frequency	50/60Hz
Current	0.4~4.5A
Max. power consumption	0.36kW
Compressor power	0.3kW
	0.4HP
Nominal cooling capacity	2559Btu/h
	0.75kW
	644Kcal/h
Pump power	0.05kW
Max. pump pressure	1.2bar
Rated flow	8L/min
Refrigerant	R-134a/R-32/R-1234yf
Precision	±0.3°C
Reducer	Capillary
Tank capacity	8L
Inlet and outlet	OD 10mm barbed connector
N.W	21kg
G.W	23kg
Dimension	58 × 29 × 47cm (L × W × H)
Package dimension	65 × 36 × 51cm (L × W × H)

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

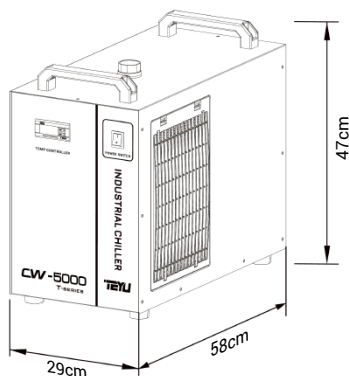

PACKAGE DIMENSION

