



CW-5200

T-SERIES
INDUSTRIAL CHILLER



Professional Temperature Control




www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Dual frequency power specification 220V 50/60Hz;
3. Constant & intelligent temperature control modes.

Cooling Performance

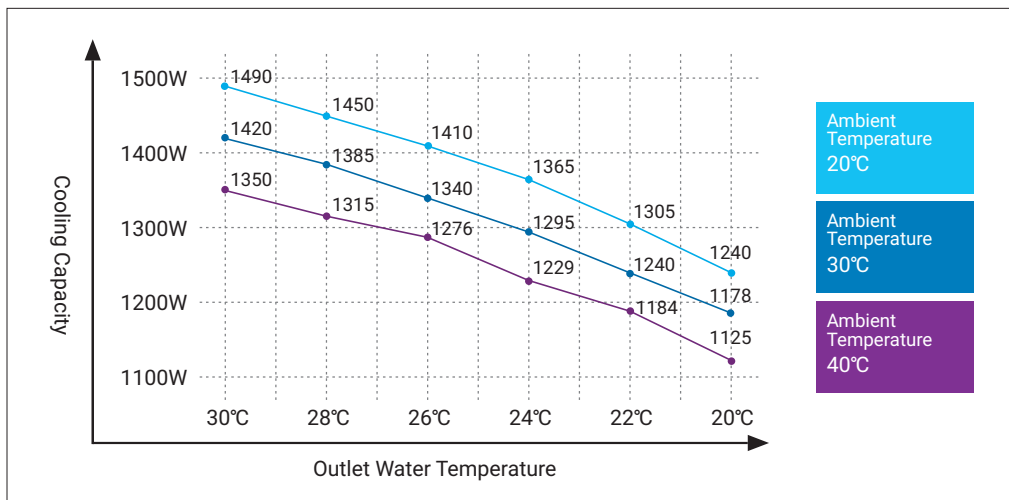

Pump Performance

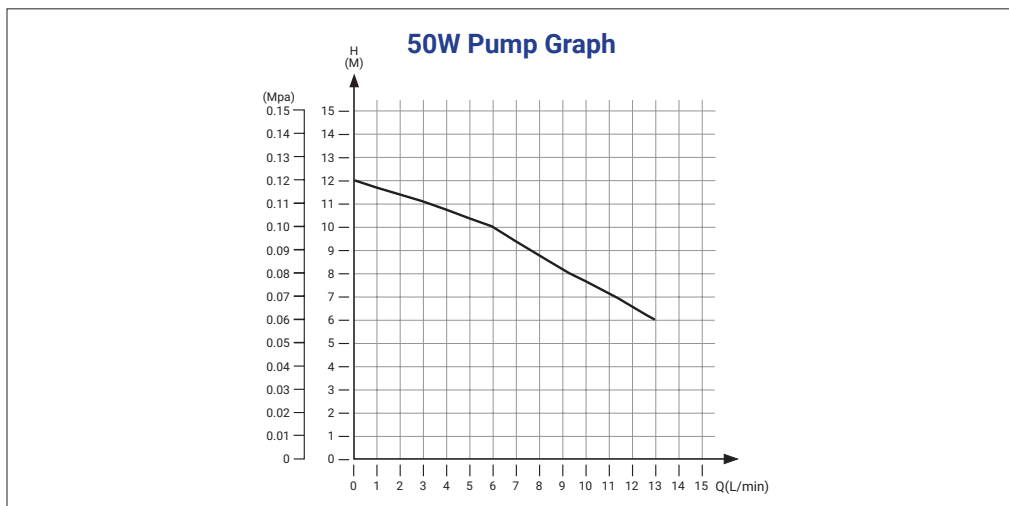


Technical Data:

Model	CW-5200TH	CW-5200DH
Voltage	AC 1P 220V	AC 1P 110V
Frequency	50/60Hz	60Hz
Current	0.5~4.6 A	0.5~8.9 A
Machine power	0.74/0.82 kW	0.77 kW
Compressor power	0.6/0.62 kW	0.66 kW
	0.82/0.84 HP	0.9 HP
Nominal cooling capacity	6040/7303 Btu/h	5699 Btu/h
	1.77/2.14 kW	1.67 kW
	1521/1839 Kcal/h	1435 Kcal/h
Refrigerant charge	370g	330g
Pump power	0.05kW	
Max. lift	12M	
Max. flow	13L/min	
Refrigerant	R-407c	R-410a
Precision	±0.3℃	
Reducer	Capillary	
Tank capacity	6L	
Inlet and outlet	OD 10mm barbed connector	
N.W	26Kgs	23Kgs
G.W	29Kgs	26Kgs
Dimension	58 X 29 X 47 cm (L X W X H)	
Package dimension	65 X 39 X 56 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

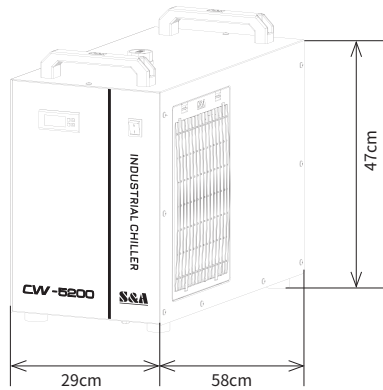

PACKAGE DIMENSION

