


CW-5200

T-SERIES
INDUSTRIAL CHILLER



Professional Temperature Control




www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Dual frequency power specification 220V 50/60Hz;
3. Delivers both precision and energy savings through dual intelligent temperature control modes.

Cooling Performance

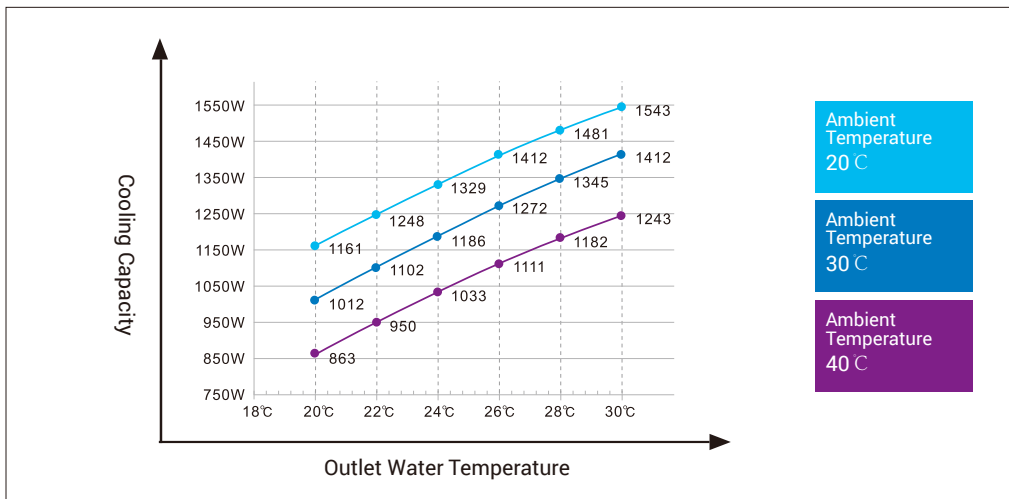

Pump Performance

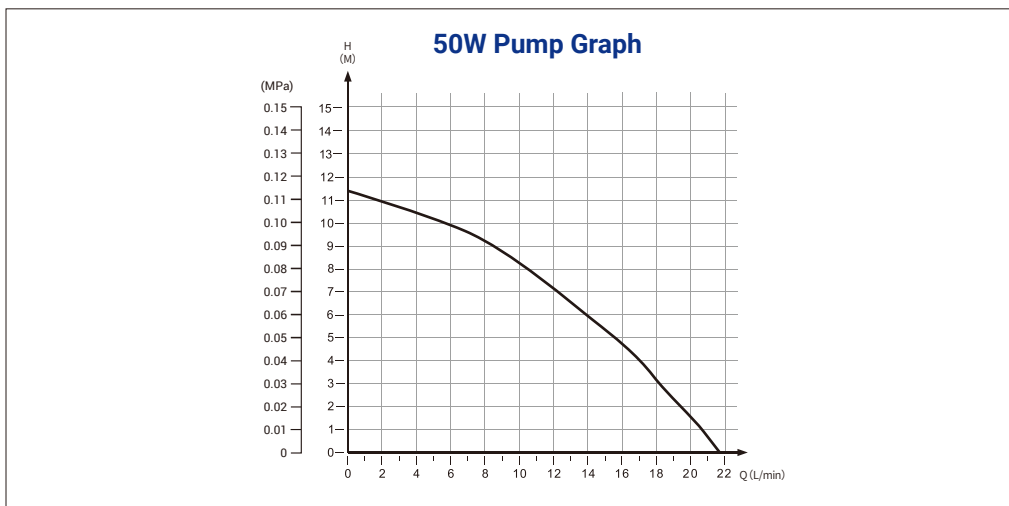


Technical Data:

Model	CW-5200THTY	CW-5200DHTY
Voltage	AC 1P 220V~240V	AC 1P 110V
Frequency	50/60Hz	60Hz
Current	0.5~3.9A	0.5~5.4A
Max. power consumption	0.67/0.74kW	0.57kW
Compressor power	0.54/0.61kW	0.44kW
	0.73/0.83HP	0.6HP
Nominal cooling capacity	4879Btu/h	
	1.43kW	
	1229Kcal/h	
Pump power	0.05kW	
Max. pump pressure	1.2bar	
Rated flow	8L/min	
Refrigerant	R-134a/R-32/R-1234yf	R-410A/R-32/R-1234yf
Precision	±0.3°C	
Reducer	Capillary	
Tank capacity	8L	
Inlet and outlet	OD 10mm barbed connector	
N.W	21kg	23kg
G.W	23kg	25kg
Dimension	58 × 29 × 47cm (L × W × H)	
Package dimension	65 × 36 × 51cm (L × W × H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

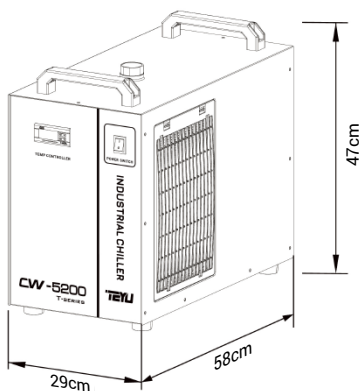

PACKAGE DIMENSION

