

CW-5300

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

Temperature
Stability

$\pm 0.3^{\circ}\text{C}$



S&A[®]
特域机电


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Adjustable water temperature with ultra-high temperature & flow alarm protection.
3. Constant & intelligent temperature control modes.

Cooling Performance

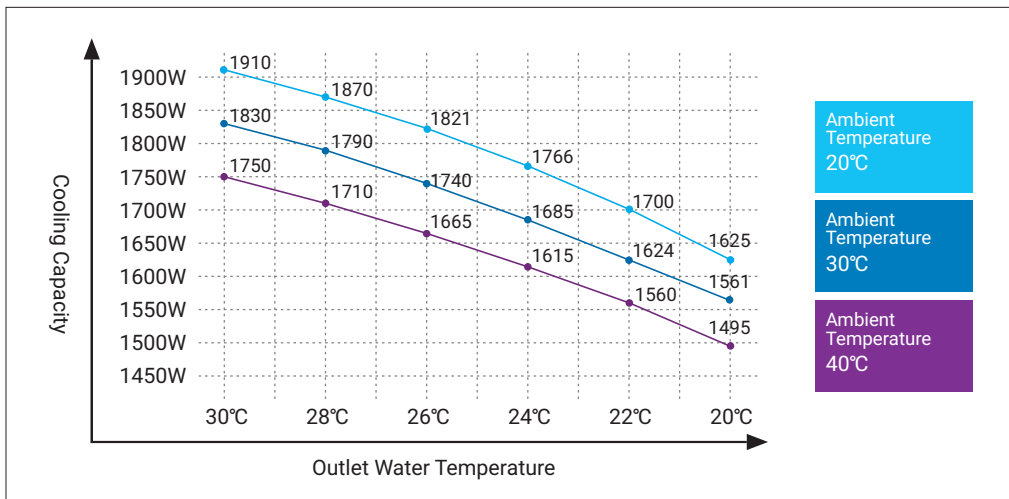

Pump Performance

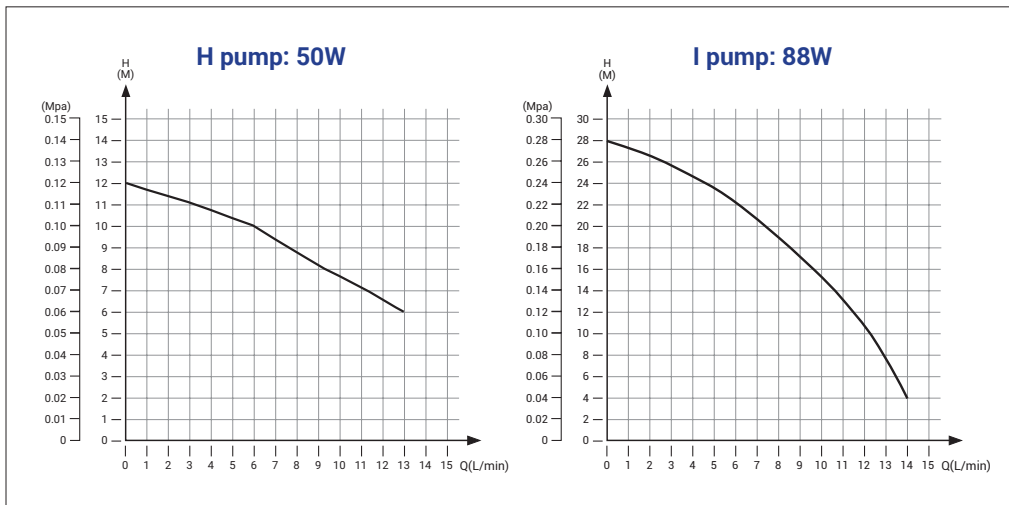


Technical Data:

Model	CW-5300AH	CW-5300BH	CW-5300DH	CW-5300AI	CW-5300BI	CW-5300DI
Voltage	AC 1P 220-240V		AC 1P 110V	AC 1P 220-240V		AC 1P 110V
Frequency	50Hz	60Hz	60Hz	50Hz	60Hz	60Hz
Current	0.5~5.8A		0.5~7.3A	0.8~6.1A		0.8~7.6A
Machine power	0.94 kW	0.95 kW	0.74 kW	0.98 kW	0.99 kW	0.78 kW
Compressor power	0.84 kW	0.83 kW	0.62 kW	0.84 kW	0.83 kW	0.62 kW
	1.14 HP	1.13 HP	0.84 HP	1.14 HP	1.13 HP	0.84 HP
Nominal cooling capacity	8427Btu/h	9280Btu/h	6040Btu/h	8427Btu/h	9280Btu/h	6040Btu/h
	2.47kW	2.72kW	1.77kW	2.47kW	2.72kW	1.77kW
	2123 Kcal/h	2338 Kcal/h	1521 Kcal/h	2123 Kcal/h	2338 Kcal/h	1521 Kcal/h
Refrigerant charge	610g	540g	450g	610g	540g	450g
Pump power	0.05kW			0.09kW		
Max. lift	12M			25M		
Max. flow	13L/min			15L/min		
Refrigerant	R-410a					
Precision	±0.3°C					
Reducer	Capillary					
Tank capacity	10L					
Inlet and outlet	Rp1/2"					
N.W	46Kgs	44Kgs		48Kgs	44Kgs	45Kgs
G.W	52Kgs	50Kgs		54Kgs	50Kgs	51Kgs
Dimension	59X38X74 cm (L X W X H)					
Package dimension	68X53X92 cm (L X W X H)					

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

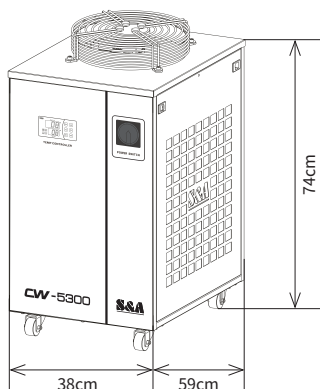

PACKAGE DIMENSION

