

CW-5300

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

Temperature
Stability

$\pm 0.3^{\circ}\text{C}$



S&A[®]
特域机电


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Adjustable water temperature with ultra-high temperature & flow alarm protection.
3. Constant & intelligent temperature control modes.

Cooling Performance

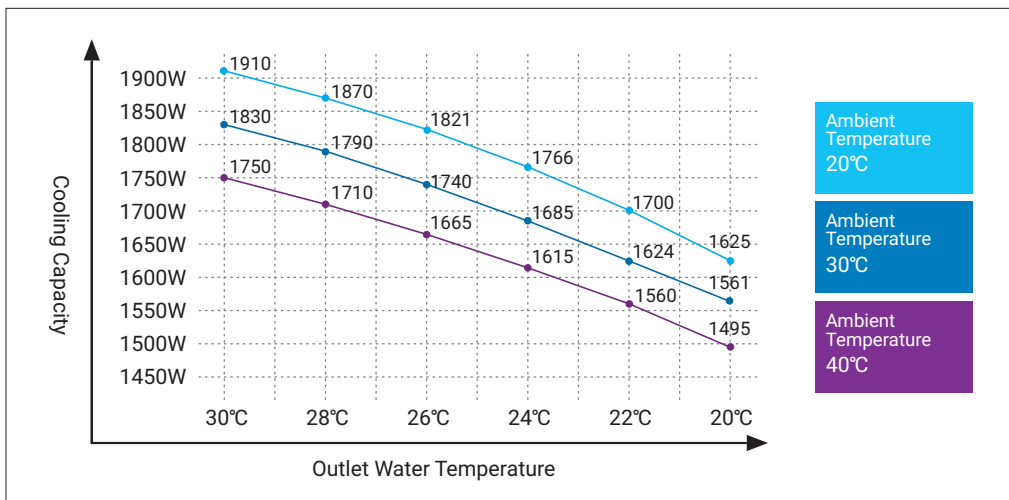

Pump Performance

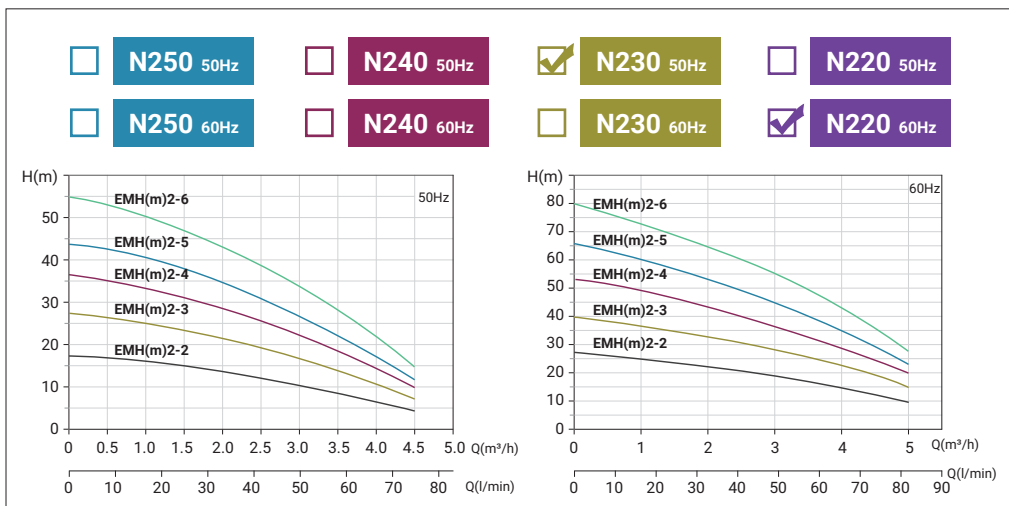


Technical Data:

Model	CW-5300AN230	CW-5300BN220
Voltage	AC 1P 220-240V	
Frequency	50Hz	60Hz
Current	2.3~7.6A	2.1~7.4A
Machine power	1.26 kW	1.27 kW
Compressor power	0.84 kW	0.83 kW
	1.14 HP	1.13 HP
Nominal cooling capacity	8427 Btu/h	9280Btu/h
	2.47kW	2.72kW
	2123 Kcal/h	2338 Kcal/h
Refrigerant charge	610g	540g
Pump power	0.37 kW	
Max. lift	27 M	
Max. flow	70L/min	
Refrigerant	R-410a	
Precision	±0.3°C	
Reducer	Capillary	
Tank capacity	10L	
Inlet and outlet	Rp1/2"	
N.W	45Kgs	50Kgs
G.W	51Kgs	56Kgs
Dimension	59X38X74 cm (L X W X H)	
Package dimension	68X53X92 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

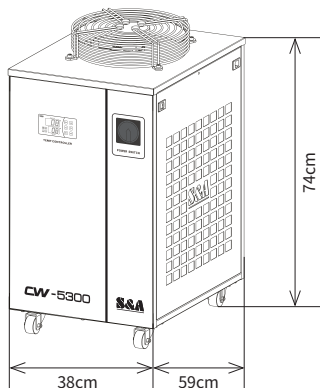

PACKAGE DIMENSION

