

CW-6000

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

$\pm 0.5^{\circ}\text{C}$

Temperature
Stability

TEYU


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.5^{\circ}\text{C}$;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

Cooling Performance

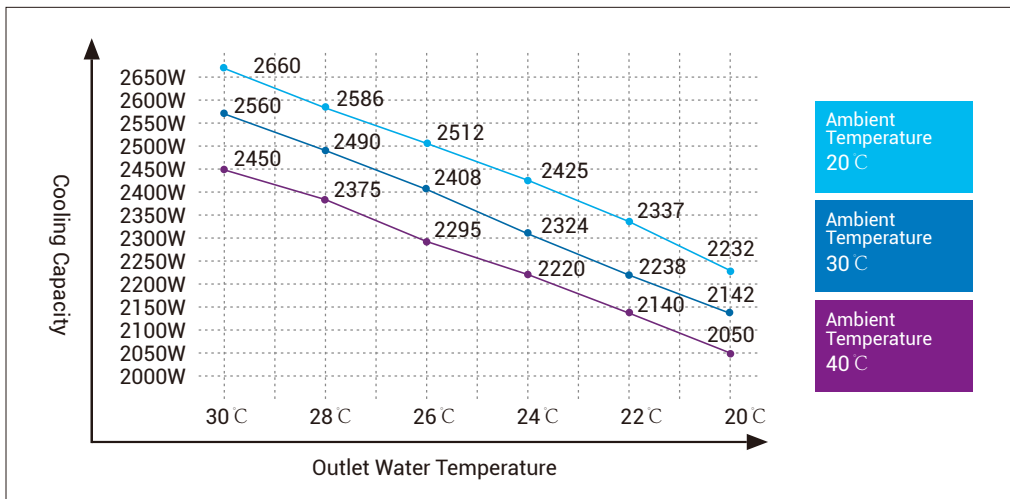

Pump Performance

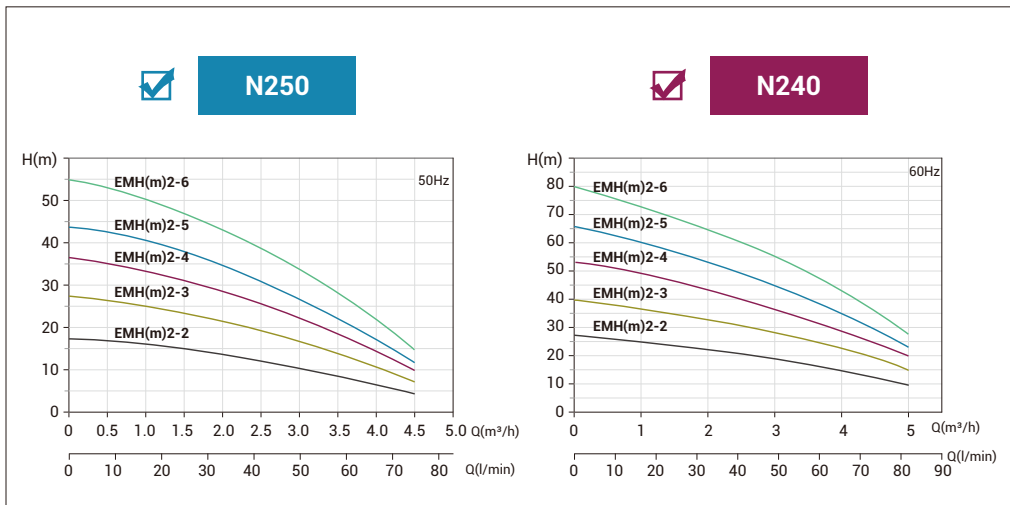


Technical Data:

Model	CW-6000AN250TY	CW-6000BN240TY	CW-6000DN240TY
Voltage	AC 1P 220~240V		AC 1P 110V
Frequency	50Hz	60Hz	
Current	2.3~7A	2.1~6.6A	6~14.4A
Max. power consumption	1.4kW	1.36kW	1.51kW
Compressor power	0.94kW	0.88kW	0.79kW
	1.26HP	1.17 HP	1.06 HP
Nominal cooling capacity	10713Btu/h		
	3.14kW		
	2699 Kcal/h		
Pump power	0.55kW	0.75kW	
Max. pump pressure	4.4bar	5.3bar	
Max. pump flow	75L/min		
Refrigerant	R-410a		
Precision	±0.5℃		
Reducer	Capillary		
Tank capacity	12L		
Inlet and outlet	Rp1/2"		
N.W	43Kg		
G.W	52Kg		
Dimension	59 X 38 X 74cm (L X W X H)		
Package dimension	66 X 48 X 92cm (L X W X H)		

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

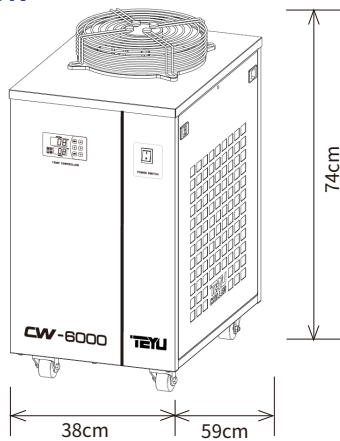

PACKAGE DIMENSION

