

CW-6000

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

$\pm 0.5^{\circ}\text{C}$

Temperature
Stability

TEYU


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.5^{\circ}\text{C}$;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

Cooling Performance

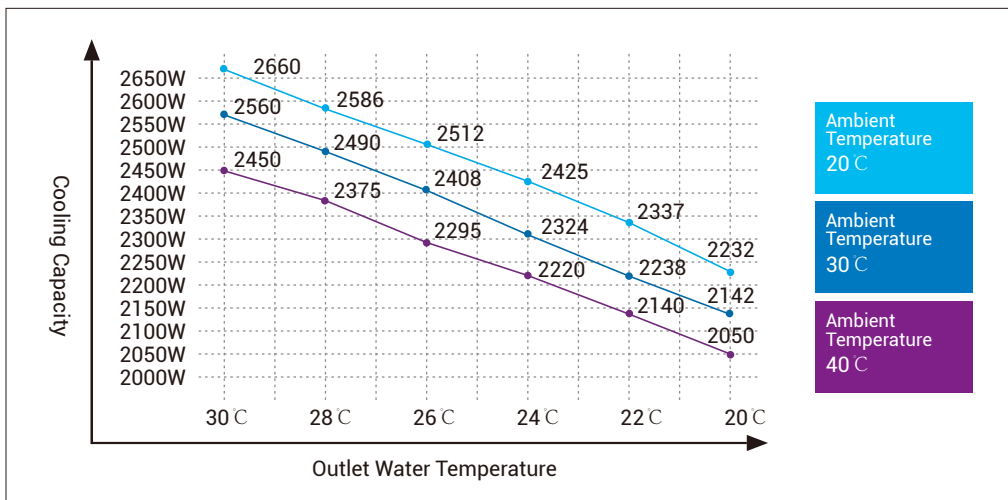

Pump Performance

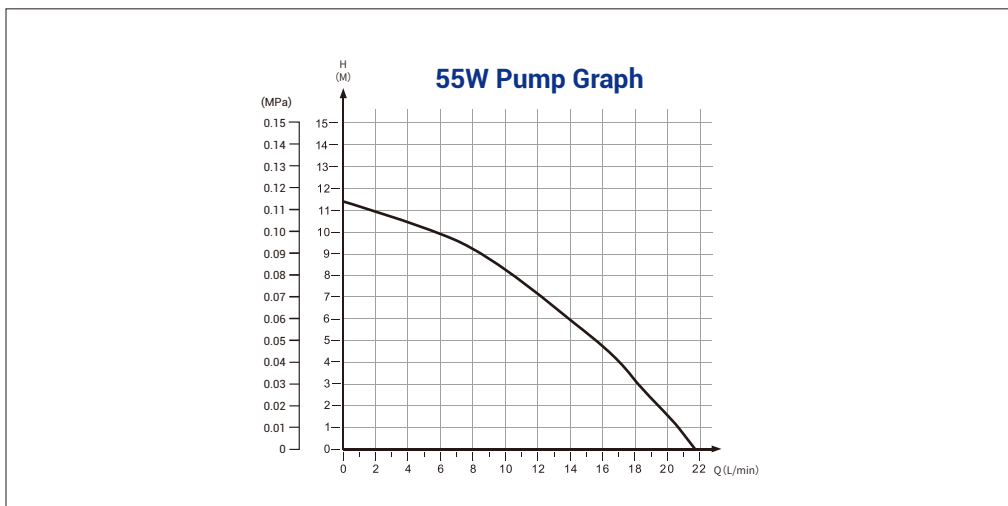


Technical Data:

Model	CW-6000AHTY	CW-6000BHTY	CW-6000DHTY
Voltage	AC 1P 220~240V		AC 1P 110V
Frequency	50Hz	60Hz	60Hz
Current	0.5~5.2A	0.5~4.9A	0.5~8.9A
Max. power consumption	1.08kW	1.04kW	0.96kW
Compressor power	0.94kW	0.88kW	0.79kW
	1.26HP	1.17HP	1.06HP
Nominal cooling capacity	10713Btu/h		
	3.14 kW		
	2699Kcal/h		
Pump power	0.05 kW		
Max. pump pressure	1.2bar		
Max. pump flow	13 L/min		
Refrigerant	R-410a		
Precision	±0.5℃		
Reducer	Capillary		
Tank capacity	12L		
Inlet and outlet	Rp1/2"		
N.W	35Kg		
G.W	44Kg		
Dimension	59 X 38 X 74cm (L X W X H)		
Package dimension	66 X 48 X 92cm (L X W X H)		

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

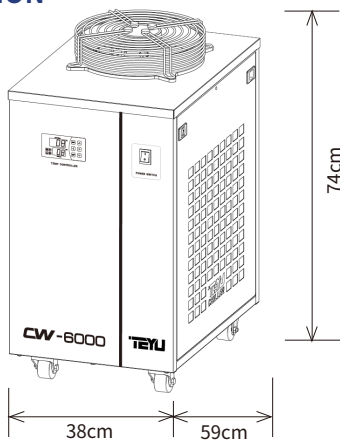

PACKAGE DIMENSION

