

CW-6100

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

$\pm 0.5^{\circ}\text{C}$

Temperature
Stability

TEYU


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.5^{\circ}\text{C}$;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

Cooling Performance

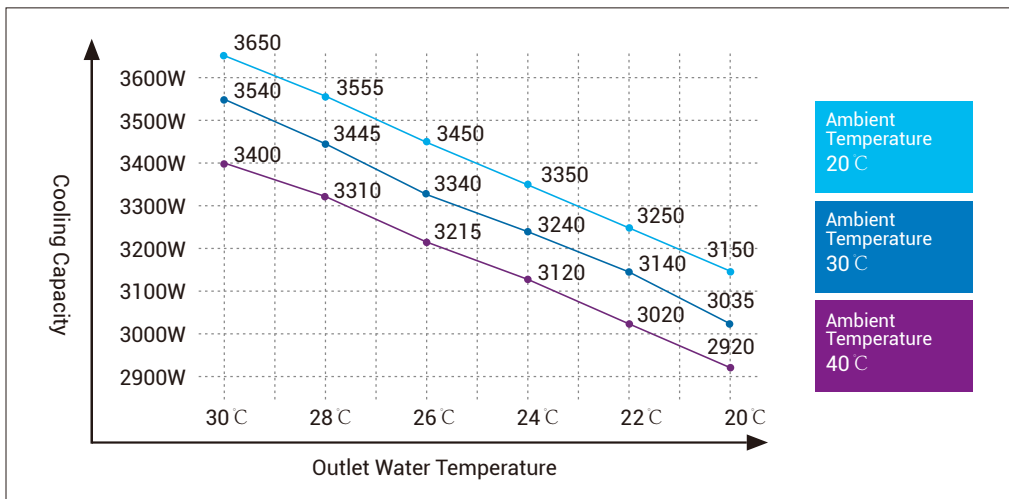

Pump Performance

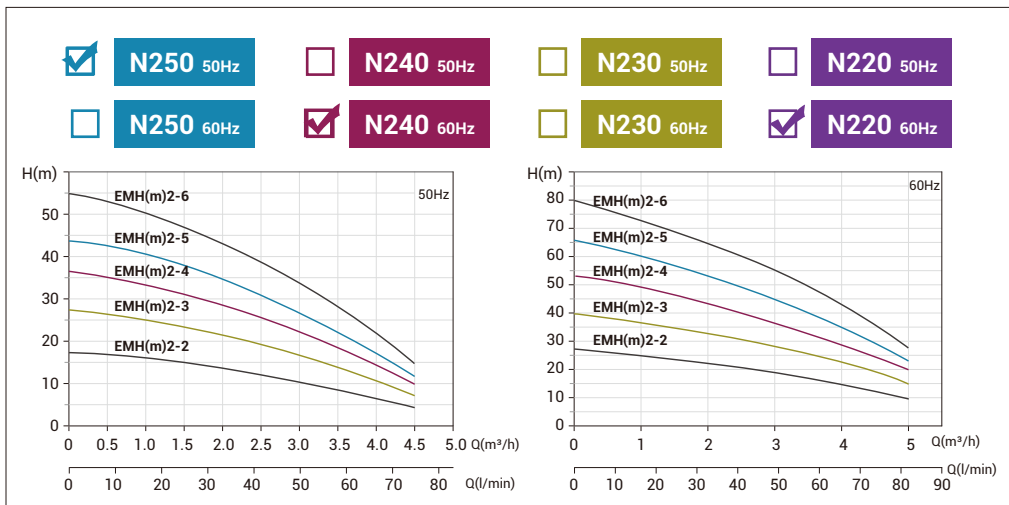


Technical Data:

Model	CW-6100AN250TY	CW-6100BN240TY
Voltage	AC 1P 220~240V	
Frequency	50Hz	60Hz
Current	2.3~8.1A	2.1~8.8A
Max. power consumption	1.62kW	1.84kW
Compressor power	1.12kW	1.29kW
	1.5HP	1.73HP
Nominal cooling capacity	13648Btu/h	
	4kW	
	3439Kcal/h	
Pump power	0.55kW	0.75kW
Max. pump pressure	4.4bar	5.3bar
Max. pump flow	75L/min	
Refrigerant	R-410a	
Precision	±0.5°C	
Reducer	Capillary	
Tank capacity	22L	
Inlet and outlet	Rp1/2"	
N.W	55Kg	
G.W	66Kg	
Dimension	67 X 47 X 89 cm (L X W X H)	
Package dimension	73 X 57 X 105 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

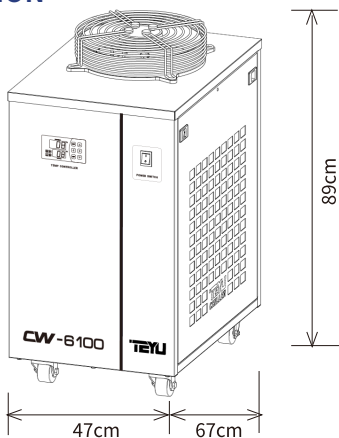

PACKAGE DIMENSION

