

# CW-6500

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature  
Control Mode



Support Modbus-485  
Communication

**S&A**<sup>®</sup>  
特域机电


[www.teyuchiller.com](http://www.teyuchiller.com)

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


## Features:

- 1.Support Modbus-485 communication protocol;
- 2.Designed with multiple alarms & error display functions;
- 3.CE, RoHS and REACH approval.

## Cooling Performance

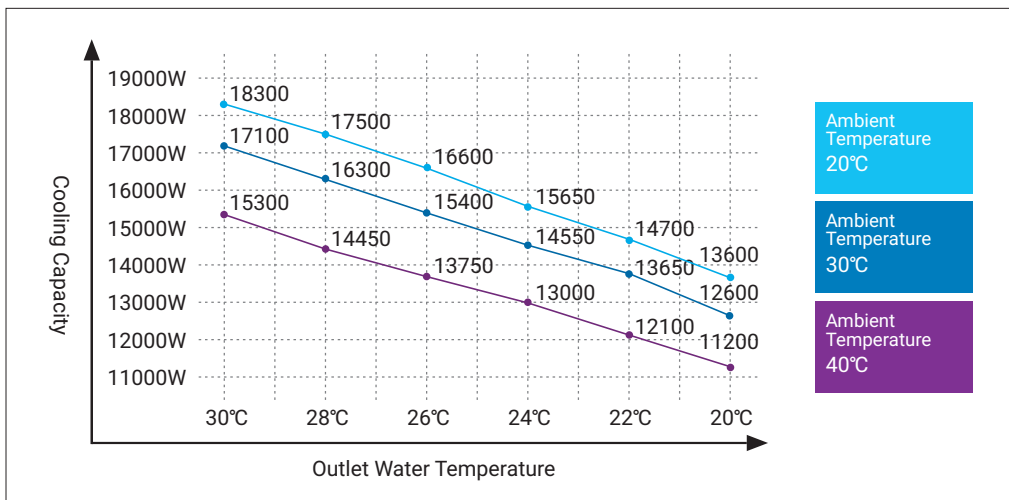

## Pump Performance

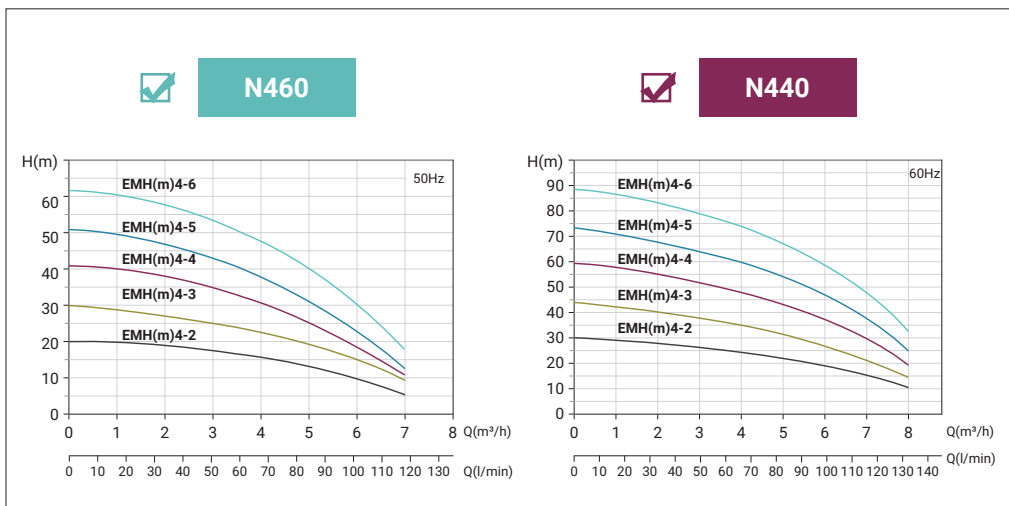


# Technical Data:

| Model                    | CW-6500EN460                | CW-6500FN440 |
|--------------------------|-----------------------------|--------------|
| Voltage                  | AC 3P 380V                  |              |
| Frequency                | 50Hz                        | 60Hz         |
| Current                  | 1.4~13.3A                   | 1.5~13.5A    |
| Machine power            | 6.7kW                       | 7.1kW        |
| Compressor power         | 5.53kW                      | 5.45kW       |
|                          | 7.52HP                      | 7.31HP       |
| Nominal cooling capacity | 55786Btu/h                  | 53910Btu/h   |
|                          | 16.35kW                     | 15.8kW       |
|                          | 14057Kcal/h                 | 13585Kcal/h  |
| Refrigerant charge       | 1400g                       | 1610g        |
| Pump power               | 1.1kW                       | 1kW          |
| Max. lift                | 61.5M                       | 59M          |
| Max. flow                | 117L/min                    | 133L/min     |
| Refrigerant              | R-410a                      |              |
| Precision                | ±1°C                        |              |
| Reducer                  | Capillary                   |              |
| Tank capacity            | 70L                         |              |
| Inlet and outlet         | Rp1"                        |              |
| N.W                      | 173Kgs                      | 178Kgs       |
| G.W                      | 233Kgs                      | 238Kgs       |
| Dimension                | 105X 71 X 133 cm (LX W X H) |              |
| Package dimension        | 116X 93X 150 cm (LX W X H)  |              |

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

## DIMENSION

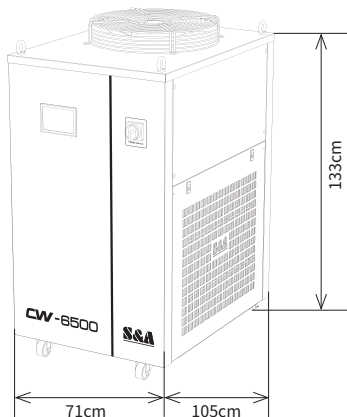

## PACKAGE DIMENSION

