

CW-8000

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode



Support Modbus-485
Communication

TEYU


www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

- 1.Support Modbus-485 communication protocol;
- 2.Designed with multiple alarms & error display functions;
- 3.CE, RoHS and REACH approval.

Cooling Performance

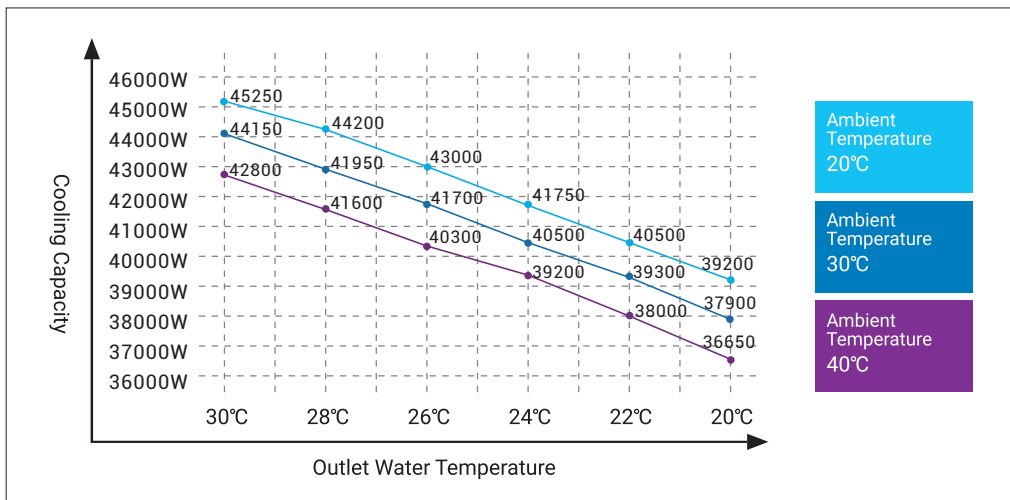

Pump Performance

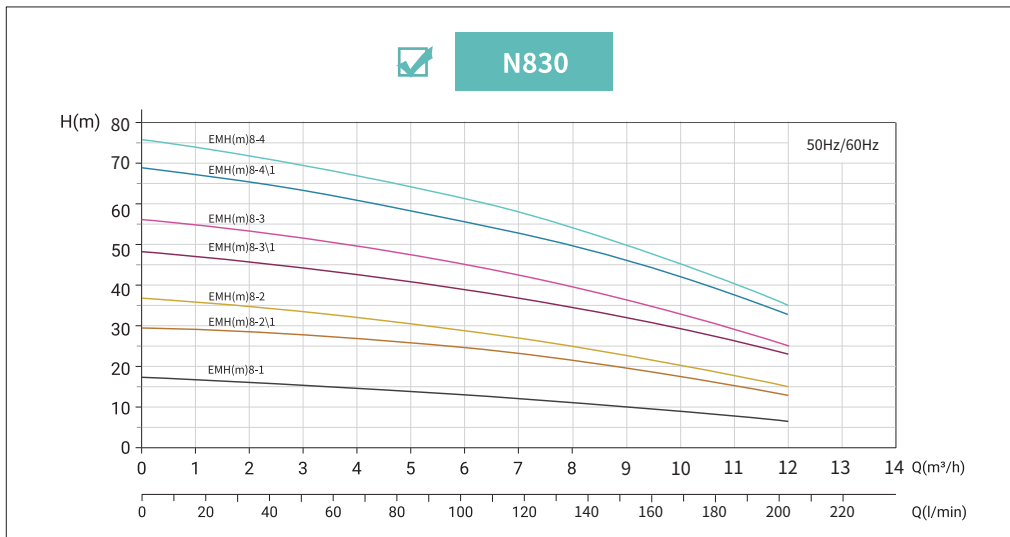


Technical Data:

Model	CW-8000ENTY	CW-8000FNTY
Voltage	AC 3P 380V	
Frequency	50Hz	60Hz
Current	6.4~32.6A	8.4~42A
Max. pump consumption	16.56kW	22kW
Compressor power	12.16kW	13.3kW
	16.3HP	17.8HP
Nominal cooling capacity	143304Btu/h	
	42kW	
	36111Kcal/h	
Refrigerant	R-410a	
Precision	±1℃	
Reducer	Capillary	
Pump power	2.2kW	3kW
Tank capacity	210L	
Inlet and outlet	Rp1-1/2"	
Max. pump pressure	75M	55M
Max. pump flow	200L/min	
N.W	460Kg	
G.W	536Kg	
Dimension	190 X108 X 140cm (L X W X H)	
Package dimension	202 X 123 X 161cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

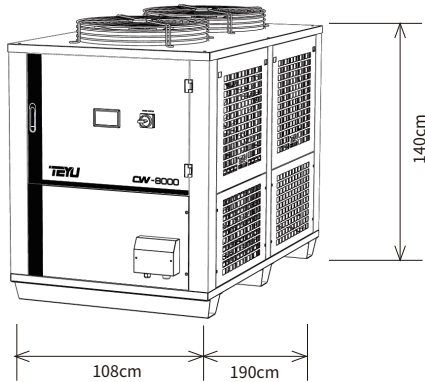

PACKAGE DIMENSION

