

CWFL-8000

FIBER LASER CHILLER



Professional Temperature Control



Dual Temperature
Control Mode



Support ModBus 485
communication



www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.

Features



Multiple warning
protections
Water level alarm,
over-temperature alarm,
water flow alarm, etc.



Thermal insulation
for water tubing,
pump and evaporator



Fully hermetic
compressor with built-in
motor protection



Support ModBus 485
communication:
real-time monitoring and
remote control



Temperature controller

Display water temperature
of laser & optics cooling circuits
Temperature stability of $\pm 1^{\circ}\text{C}$



Stainless steel filter

Recyclable and anti-clogging



Waterproof junction box

Safe and stable, flexible power
cable installation



Double-effect heating

Plate heat exchanger and heater
to achieve efficient heating to
prevent condensation



Dual premium axial fan

Quiet, efficient heat dissipation
and maintenance-free



WATER PRESSURE



Water pressure gauge

Display of water pump status
and water pressure

Component Description

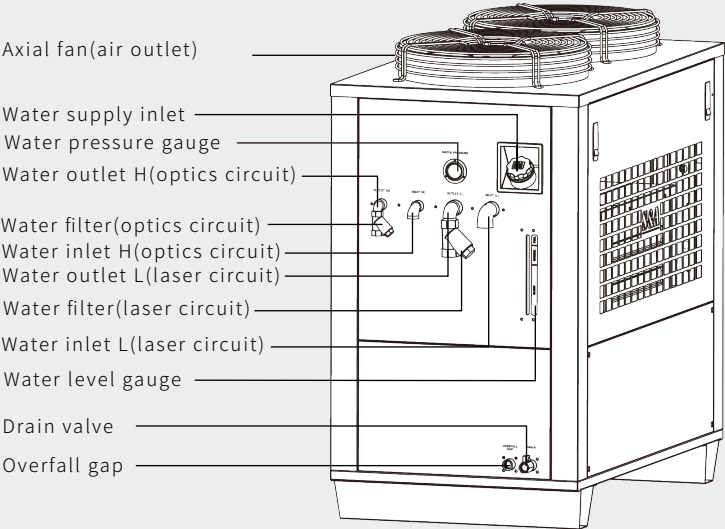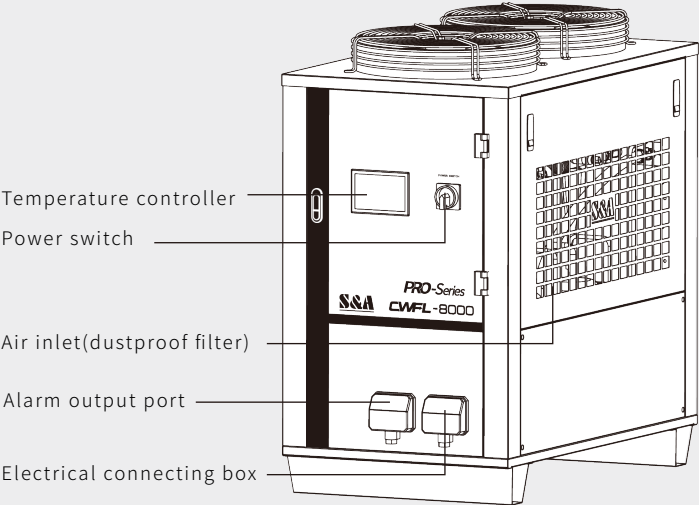


Technical Data

Model	CWFL-8000EN	CWFL-8000FN
Voltage	AC 3P 380V	AC 3P 380V
Frequency	50Hz	60Hz
Current	2.1~16.9A	2.1~16.5A
Max. power consumption	7.66kW	8.64kW
Heater power	600W + 3600W	
Precision	±1°C	
Reducer	Capillary	
Pump power	1.1kW	1.0kW
Tank capacity	100L	
Inlet and outlet	Rp1/2" + Rp1"	
Pump pressure	6.15bar	5.9bar
Rated flow	2 L/min+>65 L/min	
N.W	204Kg	200Kg
G.W	232Kg	228Kg
Dimension	120×64×116 cm (L×W×H)	
Package dimension	135×84×137 cm (L×W×H)	

Note: the working current can be different under different working conditions; The above information is for reference only. Please subject to the actual delivered product.

Dimension :

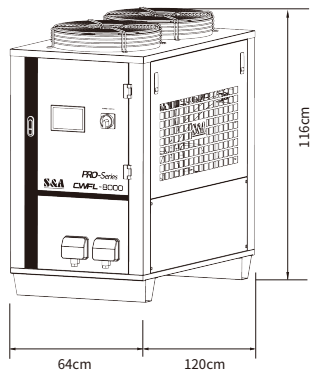

Package Dimension :

